

Easy installation to visualize residual liquid and check instantly!

For more details:



Laser-Type Liquid Level Gauge **New!**


Wireless data transmission!
Remote monitoring!

Fluid Used
oil, kerosene, diesel,
water, waste liquid

Portable and convenient to carry anywhere!

Wireless Type (subunit)

GDE-CLW




Standard Type (without wireless)

GDE-CL


Ready to use anywhere



Accurately displays the residual amount as a numerical value on the LCD panel!

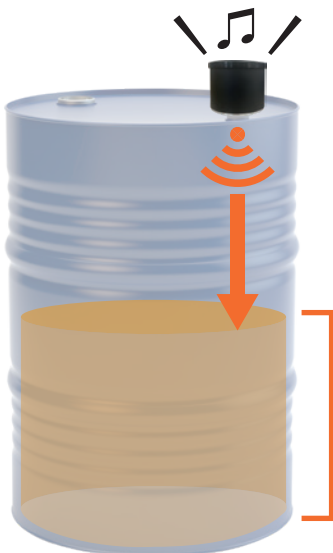

50%

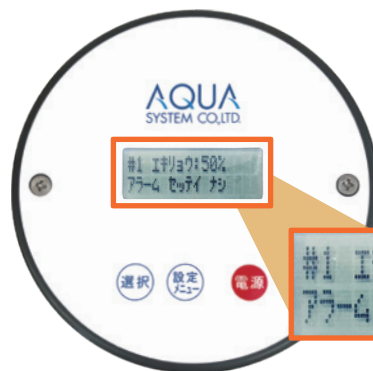

Select the unit from '%', 'L', or 'mm' to display on the LCD panel.

Capable of detecting up to two liquid level points (alarm and external output)




【Easy setup to fit the container】
IBC tanks / drum cans / poly drum cans / other containers are also configurable

Turning customer feedback into actionable solutions! Eliminating concerns about stock shortages!

Those who want to check the tank's residual level at once! This is for you!

Remote Monitoring System


1. Set up the wireless subunit on the drum.
2. Sends liquid level data to the main unit every 30 seconds.
3. Allows simultaneous monitoring of up to 15 units.

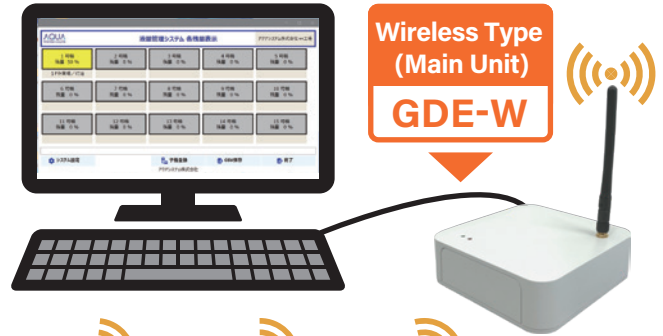


Liquid Level Management App (PC only)

Radar Type Liquid Level Gauge.exe

*Developed under the Third Supplementary Budget for the Fiscal Year of 2020 Business Restructuring Subsidy Program.

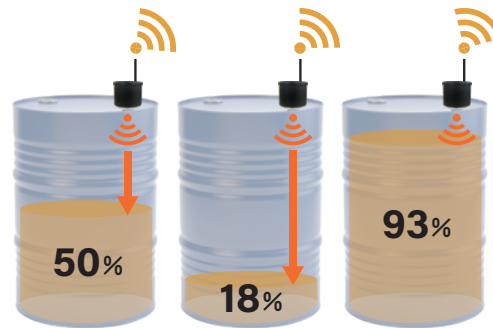


You can check the liquid level trends through graphs!

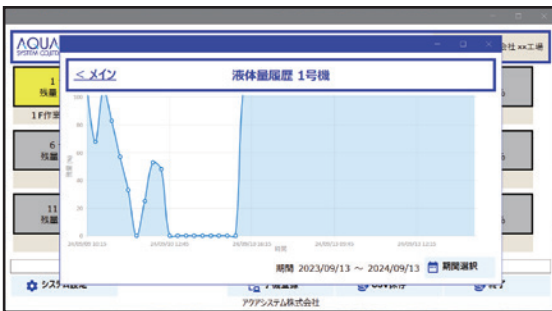

By visually tracking changes in liquid levels, you can determine the optimal timing for replenishment. Achieve efficiency in liquid management through batch monitoring and liquid level tracking.

- Available for download in CSV format
- Storage period of up to one year

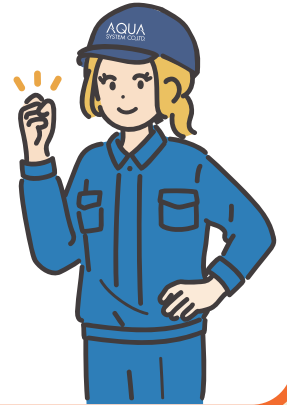

《Specifications》

Model	Wireless	Liquid Used	Usable viscosity	Liquid Temperature for Use	Power source	Size (mm)	Weight (kg)
GDE-CL	None	oil,kerosene, diesel,water, waste liquid	500cP	0°C~ 60°C	4 AA dry cell batteries	Φ106×91	450
GDE-CLW	Available				4 AA dry cell batteries AC 100V power supply	Φ106×206	460
GDE-W	Available				AC 100V power supply	125×125×157	225

*This is a dedicated app for the "GDE-CLW/GDE-W Wireless type." The 'GDE-CL / Standard Type (without wireless)' is not supported.

*GDE-W (Main unit) cannot be used alone. Please purchase it together with the GDE-CLW (subunit).

*To manage liquids using the App (PC only), please purchase one GDE-CLW for each can.

*Regarding the radio laws and import regulations of each country, please consult the appropriate authorities.

AQUA SYSTEM CO.,LTD.

TEL +81-749-30-9126 <http://en.aqsys.co.jp/>
FAX +81-749-23-9122 mailtrade@aqsys.co.jp

1-3-1, Kyo-machi, Hikone-city, Shiga, 522-0081, Japan name : FL-2024-06
2024.11 AZZZ