使用气动真空吸尘器

快速、干净清扫工厂

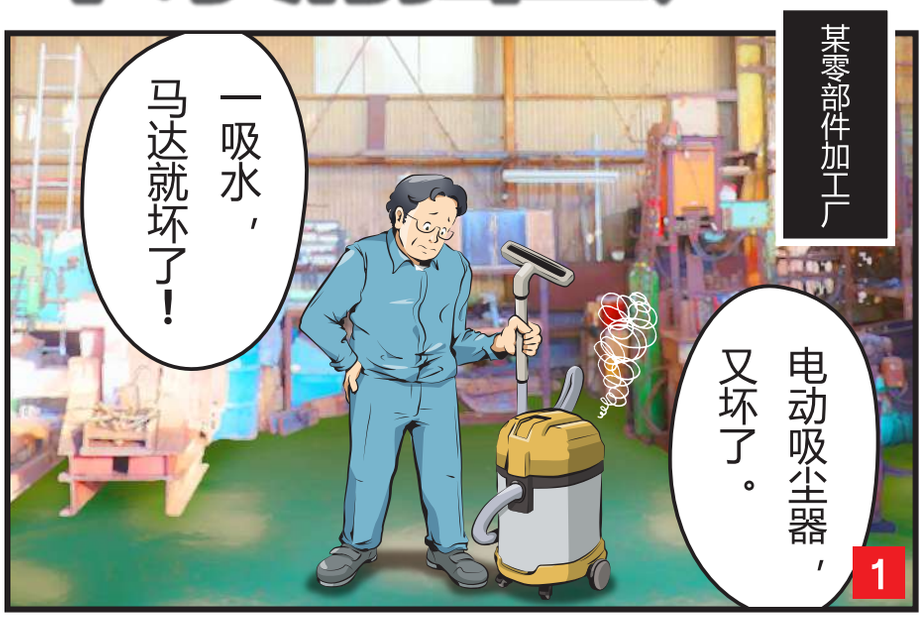

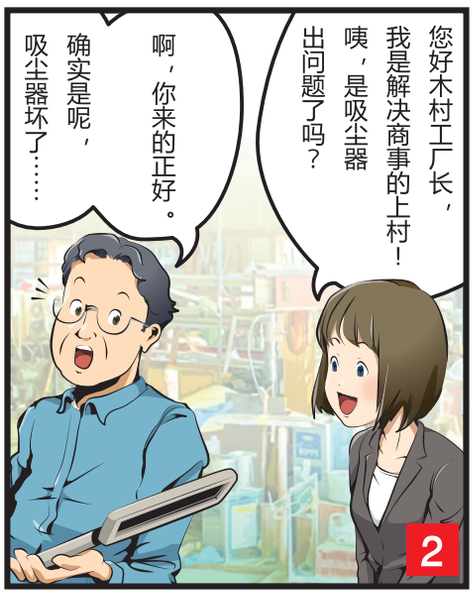

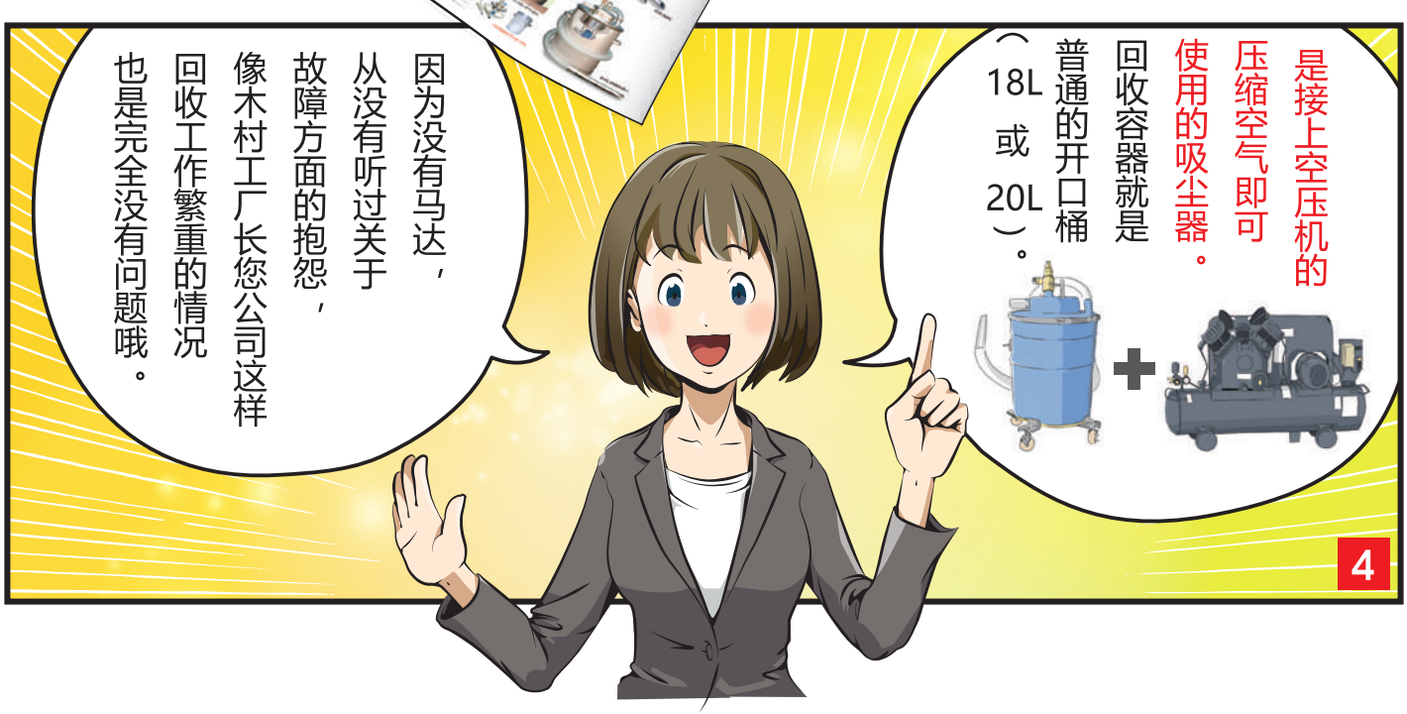

增田社长的公司
6
这样说来，对面的增田铁工所有买过这款吸尘器，我们一起去看看吧。
我和增田社长关系不错，让他带我们去现场看看吧。
5
增田社长，您好！
你好，上村小姐！是气动真空吸尘器的事吧。
7
咦？正在加工的铸件地面好干净呀！
请这边走，刚好有员工在使用！
8
在购买这款吸尘器之前，加工后用气枪吹的乱七八糟到处都是，所以先用这款吸尘大概的吸一下。
Shuuuuuu...
怪不得地面这么干净。
9

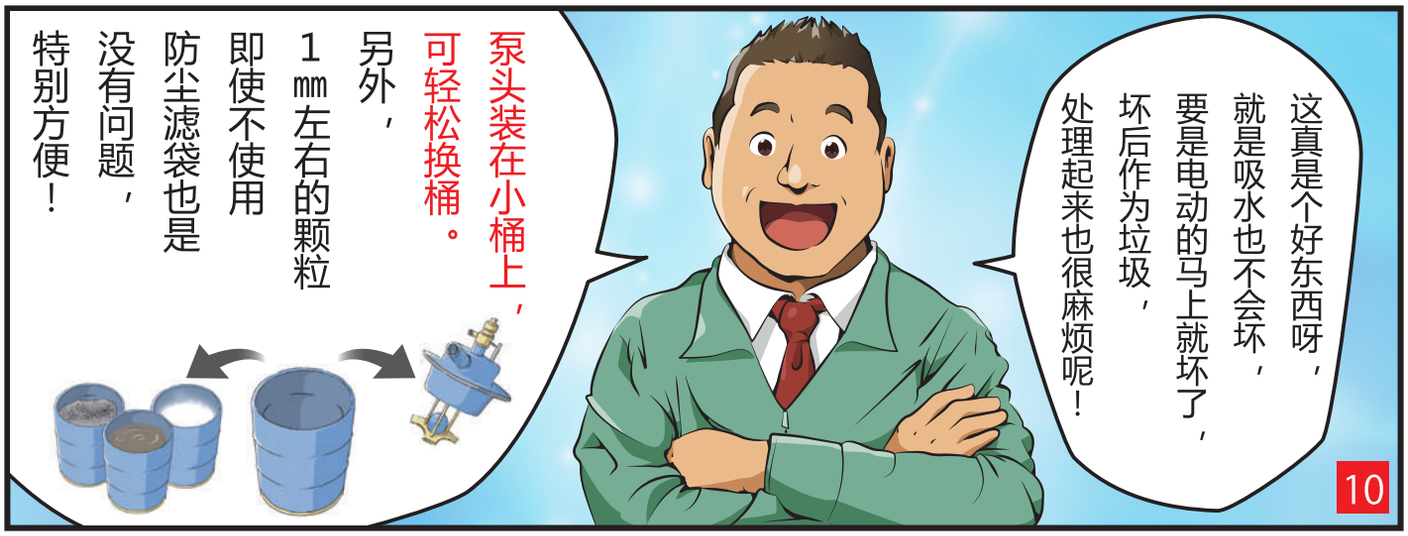

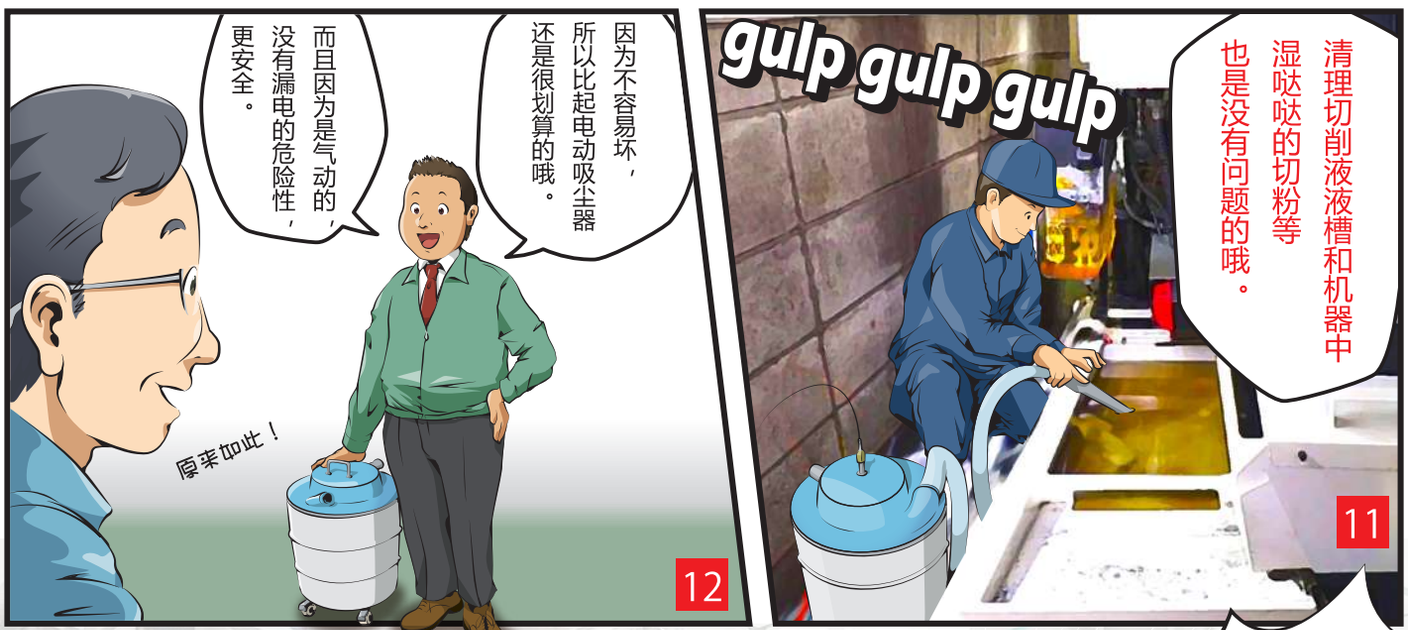

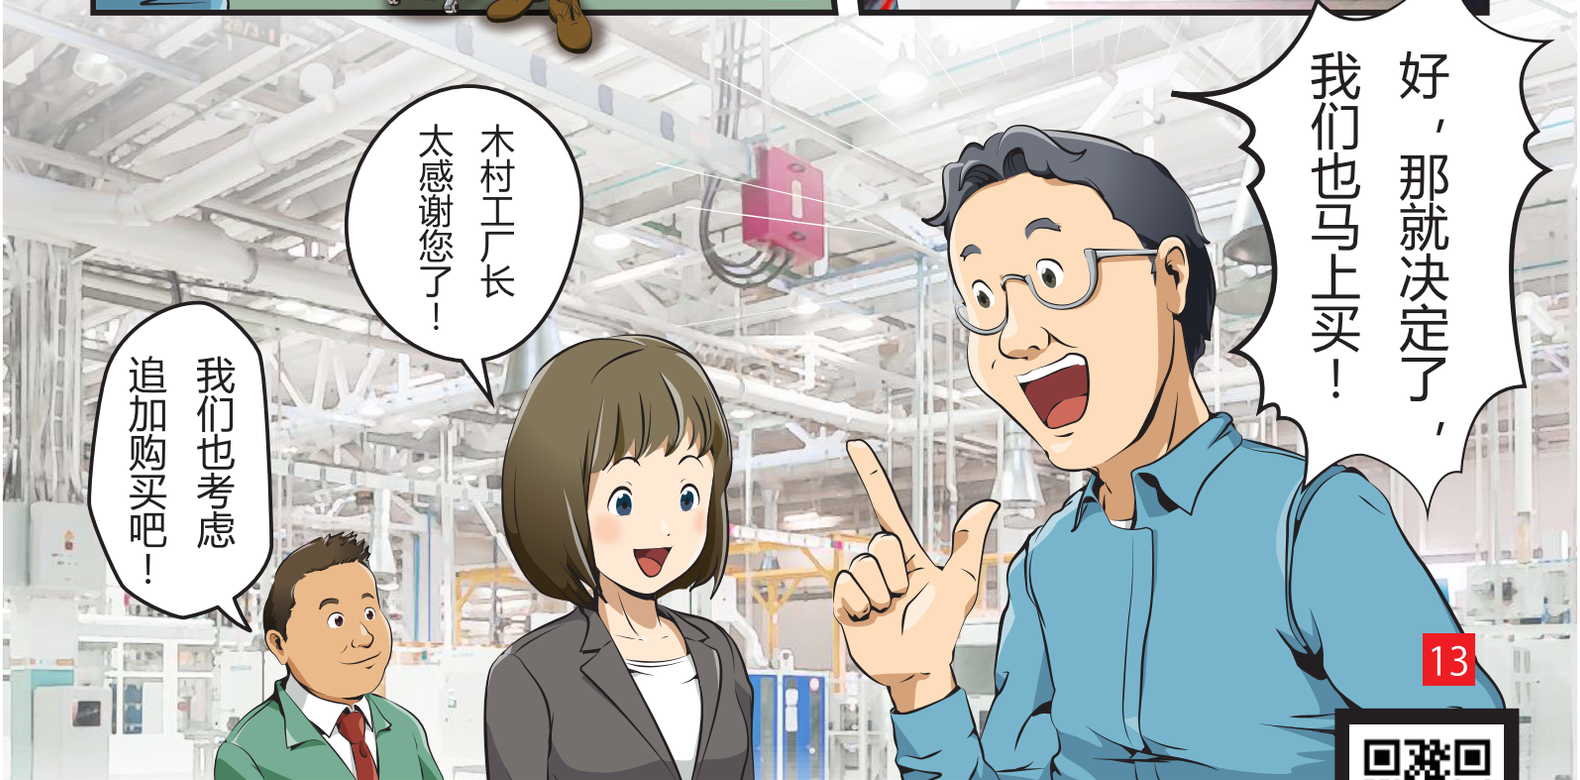

详情请在【AQUA SYSTEM】官网检索 !!

Due to air driven type, no fear on fire even at hazardous area

Air type, Vacuum cleaner for pail can

Powerful sucking to collect cutting dust and liquids, water and cutting oils

Simple three steps for operation

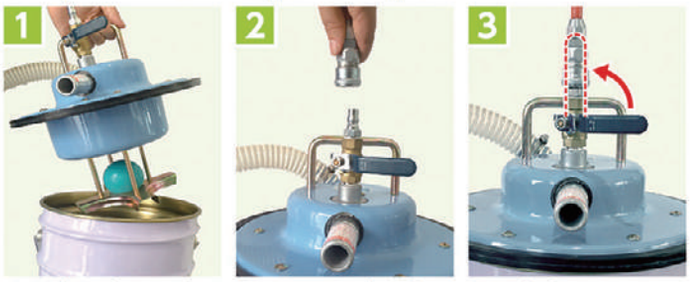

1. Just place the product on pail can.
2. Connect coupler of compressor.
3. Turn the lever to start sucking.

How to suck



1. Apply compressed air with 0.4-0.6MPa.
2. Compressed air can not enter into pail can, and goes out through ejector.
3. Negative pressure is generated, which makes air in pail can to go out.
4. As negative pressure in pail can is generated, outside air is sucked.
5. Liquid can be sucked by nozzle.
6. Once pail can becomes full of liquid, floating ball automatically blocks air outlet, and stops sucking work.

- More economical, safer and longer life than home cleaner
- To collect cutting liquid from/around machines
- To collect wasted liquid with foreign materials
- To collect sludge from drain
- Once top plate is placed, it can work as drum collector.

Vacuum cleaner for pail can **Air type** Compressor with higher than 5HP

AVC-55PC Standard Type

	Model	AVC-55PC
	Applicable liquid/ collectables	Oil·Kerosene·Light Oil·Cutting Oil·Chips·Generl Rubbish etc.
	Air Consumption	525ℓ/min
	Max. sucking capacity	60ℓ/min
	Sucking Height	2m
Accessories	Oil Stopper	Inclusive
	Carrier	Accessories
	Open Pail Can	Accessories
	Nozzle	Main Nozzle / Square Nozzle
Material/ Wet portion	Hose (Long· Inner dia.)	PVC (2m×ϕ32)
	Body/Nozzle	AL
	Packing	NBR
	Weight	4.0kg

AVC-55PC

Vacuum cleaner for pail can **Air type** Compressor with higher than 5HP

SUS Made of SUS

AVC-550SUS-i Hard to rust and tough due to stainless made

	Model	AVC-550SUS-i
	Applicable liquid/ collectables	Water·Oil·Kerosene·Light Oil·Cutting Oil·Chips·Generl Rubbish etc.
	Air Consumption	673ℓ/min
	Max. sucking capacity	80ℓ/min
	Sucking Height	2m
Accessories	Oil Stopper	Inclusive
	Carrier	Option
	Open Pail Can	Option
	Nozzle	Main Nozzle / Square Nozzle
Material/ Wet portion	Hose (Long· Inner dia.)	PVC (2m×ϕ32)
	Body/Nozzle	SUS
	Packing	NBR
	Weight	4.0kg

Washable due to stainless made

Stainless can is salable at your option

AVC-550SUS-i

AQUASYSTEM CO.,LTD.

TEL (86)0519-69551022 http://www.aqsys-cn.com/
FAX (86)0519-69885565 MAIL aqc@aqsys.co.jp
江苏省常州市新北区创业东路 16 号粤海工业园常州滨江园 11C

2020.06 CZZZ B